


Caratteristiche - Features

TIPO TYPE	KW assorb. - input	AMP 400 V.	PREVALENZA (metri) / PREVALENCE (meters)								
			2	4	6	8	10	12	14	16	18
TR 71/A	0,53	1,40	180	160	135	105	55				
TR 71/B	0,78	1,90	210	195	172	145	108	78	32		
TR 80/A	1,15	1,90	275	258	235	212	175	145	107	58	
TR 80/B	1,47	2,80	345	331	310	285	248	218	180	130	



TIPO TYPE	A mm	B mm	C mm	ØD "Gas	E mm	F mm	PESO CON WEIGHT WITH KG.
TR 71/A	320	290	130	1"	40	200	12,10
TR 71/B	320	290	130	1"	40	200	13,00
TR 80/A	370	290	130	1"	40	220	13,90
TR 80/B	370	290	130	1"	40	220	14,70

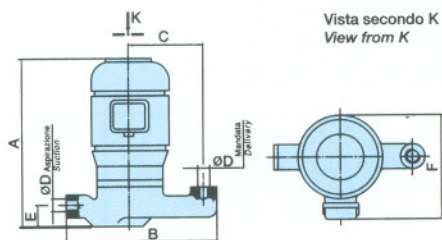

Tipo SQ



Tipo TR



Tipo AU



Tipo SP



Tipo SPV



Tipo MP



Tipo EPC