


Caratteristiche - Features

TIPO TYPE	KW assorb. - input	AMP 400 V.	PREVALENZA (metri) / PREVALENCE (meters)																	
			0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
SPV 12	0,15	0,32	60	52	43	30	8													
SPV 18	0,16	0,55	70	63	55	42	25	5												
SPV 25	0,30	0,58	85	81	75	64	50	30	3											
SPV 33	0,40	0,90	100	95	87	77	65	50	30	5										
SPV 50	0,53	1,40	180	175	170	165	160	150	140	125	105	81	60	25						
SPV 75	0,78	1,90	220	215	208	200	195	180	168	150	140	120	100	65	30	5				
SPV 100	1,15	1,90	300	290	285	273	260	277	225	200	180	150	125	85	55	15	5			
SPV 150	1,47	2,80	360	350	340	310	300	280	260	240	220	180	160	125	90	25	5			

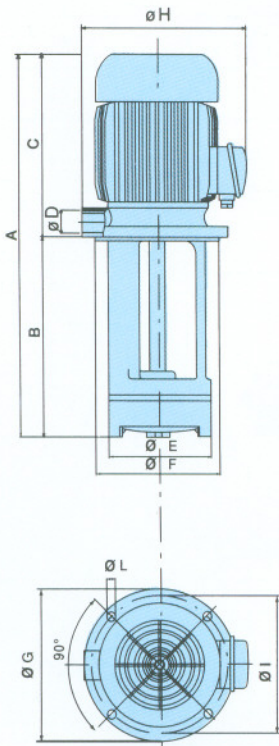

TIPO TYPE	A	B	C	ØD	ØE	ØF	ØG	H	ØI	ØL	n°	L	PESO WEIGHT
	mm	mm	mm	GAS"	mm	mm	mm	mm	mm	mm	mm	mm	KG.
SPV 12	255	90	165	3/4"	98	100	130	151	115	7	4		2,80
	285	120											2,87
	335	170											2,95
	385	220											3,05
	435	270											3,15
	515	350											3,30
SPV 18	255	90	165	3/4"	98	100	130	151	115	7	4		2,85
	285	120											2,95
	335	170											3,00
	385	220											3,10
	435	270											3,20
	515	350											3,35
SPV 25	300	90	210	3/4"	98	100	130	170	115	7	4		4,35
	330	120											4,40
	380	170											4,50
	430	220											4,60
	480	270											4,70
	560	350											4,85
SPV 33	300	90	210	3/4"	98	100	130	170	115	7	4		4,85
	330	120											4,90
	380	170											5,00
	430	220											5,10
	480	270											5,20
	560	350											5,35
SPV 50	460	200	260	1-1/4"	138	140	180	215	160	9	4		7,75
	530	270											8,30
	610	350											8,95
	700	440											9,65
	810	550											10,50
SPV 75	460	200	260	1-1/4"	138	140	180	215	160	9	4		8,70
	530	270											9,25
	610	350											9,90
	700	440											10,60
SPV 100	460	200	300	1-1/4"	138	140	180	230	160	9	4		11,45
	500	200											10,50
	570	270											11,05
	650	350											11,70
SPV 150	740	440	300	1-1/4"	138	140	180	230	160	9	4		12,40
	850	550											13,25
	500	200											11,80
	570	270											12,35
	650	350											13,00
740	440	13,70											
850	550	14,55											